

IMP Phone User Manual



Table of Content

GETTING STARTED	4
IMP PHONE AT A GLANCE.....	错误！未定义书签。
IMP PHONE INCLUDED ACCESSORIES.....	4
BUTTONS.....	4
INSTALL FOOTSTAND	6
INTERFACE	7
TOUCHSCREEN	8
VOIP REGISTRATION	9
AUTO UPGRADING.....	11
PHONE CONFIGURAION	12
SYSTEM CONFIGURATION	12
DESKTOP SET	14
BASIC FUNCTIONS.....	15
ONSCREEN KEYBOARD	15
STATUS BAR	16
IDLE DESKTOP SCREEN	17
SYSTEM APPLICATION MENU	17
IMP PHONE CALL APPLICATIONS	18
PHONE CALL APPLICATIONS.....	20

PHONE.....	20
VOICE RECORD.....	21
CONTACT.....	22
CALL LOG	25
SPEED DIAL	26
PICTURE DIAL.....	28
RECORD.....	29
MESSAGE	30
OTHER APPLICATIONS.....	31
WEB BROWSER	31
MUSIC.....	32
VIDEO.....	34
ALBUM	36
RSS READER.....	37
CALCULATOR	39
CLOCK	40
WEATHER	41
FILE MANAGER	42
CALIBRATION.....	43
NOTE.....	43

Getting Started

IMP phone Included Accessories

Items	What you can do with it
Power adapter	Power supply for IMP phone.
Ethernet cable	Connect phone to network.
Handset	Make phone calls via handset.
Handset cord	Connect handset and phone together.

Buttons




Access to RSS application. Via RSS, you can get website, blog, news and personal space refresh information in time.




Access to media player. It could play music, video, internet radio and network TV.




Open/close onscreen keyboard.



Open/close screen display. Press and hold the button for a few seconds, phone would display reboot button on screen. Then press it to do reboot.



Access to application menu. You can browse and run all applications of system.



Contact

	Speed dial.
	Picture dial.
	Release key. You can return to the idle status, or reject incoming calls, or make it as flash.
	Message.
	Call log.
	Backspace. Delete characters during typing; or quit application.
	OK.
	Earphone.
	Redial.
	Speaker.
	Volume-/+ . You can control volume with them when phone is in media player, phone ring, talking status.
	Mute. You can press it to mute the talking: the other party cannot hear you; press again to resume normal talking. Press mute key to silence it when there is incoming call ring.
	Navigation key.



Number keypad.

Install Footstand



- Place phone evenly







Place the phone on an even, horizontal surface, and insert the footstand into the slots of phone base with 25-degree angle.

- Place phone vertical or wall mounting

Insert the footstand into the slots with 55-degree angle. You may keep the phone vertical status or mount on the wall.



Interface



Item		What you can do with it
 (left)	power adapter jack	input : 220V AC output : 12V DC
 (middle)	PC Ethernet port	RJ45 , access to PC
 (right)	LAN Ethernet port	RJ45 , access to LAN
 (top)	PSTN jack	RJ11, connecting PSTN line
 (middle)	Handset jack	RJ9, connecting handset
 (bottom)	Headset jack	RJ9, connecting headset

Note:

- 1 Connect handset cord to phone's jack. Put the long, direct line side into the phone handset jack.
- 2 Install the footstand into the phone base.
- 3 Connect the power adapter to the phone and into an electric socket.

4 Connect phone's LAN port and switch (hub) port Ethernet cable. If phone's screen shows network status with , please check physical connection. If screen displays , it means phone has access to network and could configure network and get access to LAN or internet.

5 Connect phone's PC Ethernet port and PC's Ethernet port with another cable, so PC could also have access to LAN or internet.


Touchscreen

The controls on the IMP phone touchscreen change dynamically depending on the task you're performing.

Opening an Application: Tap an icon.



Scrolling: Drag up or down to scroll. On some screens such as WebPages, you can also scroll side to side.

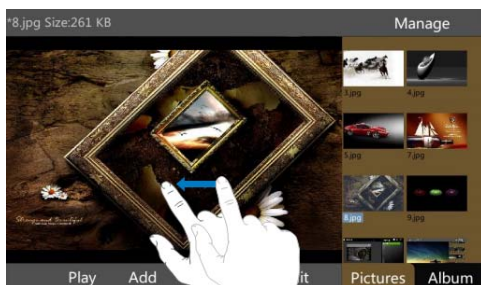

Dragging your finger to scroll won't choose or activate anything on the screen.

Flick to scroll quickly.

You can wait for the scrolling to come to a stop, or touch anywhere on the screen to stop it immediately. Touch the screen to stop scrolling won't choose or activate anything.

VoIP Registration

Login webpage


1 Open PC web browser, and enter <http://phoneip:8080> as URL.

Or Press #2*2# in idle to enter into the web interface.

A login webpage interface with a light gray background. It contains two text input fields: the first is labeled 'Username:' and the second is labeled 'Password:'. Below these fields is a button labeled 'Logon'.

2 Enter username(admin) and password(admin) and then Logon.

3 Click on submenu voip to open SIP registration.

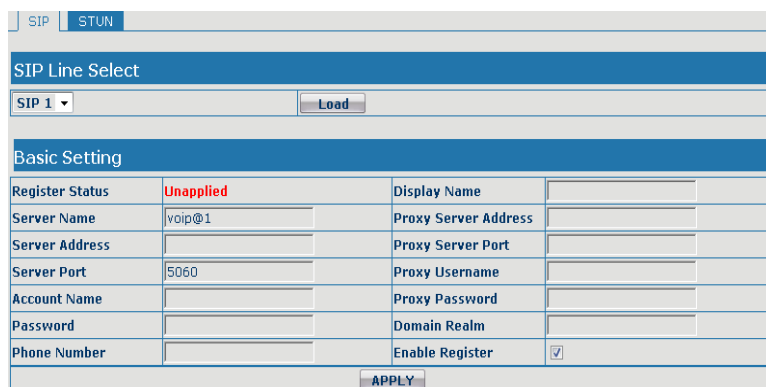A screenshot of a web interface for SIP registration. At the top, there are tabs for 'SIP' and 'STUN'. Below them is a 'SIP Line Select' section with a dropdown menu showing 'SIP 1' and a 'Load' button. The main section is titled 'Basic Setting' and contains a table of configuration fields. The 'Register Status' field is highlighted in red and shows 'Unapplied'. The 'Enable Register' checkbox is checked. An 'APPLY' button is at the bottom right.

Basic Setting	
Register Status	Unapplied
Server Name	voip@1
Server Address	
Server Port	5060
Account Name	
Password	
Phone Number	
Display Name	
Proxy Server Address	
Proxy Server Port	
Proxy Username	
Proxy Password	
Domain Realm	
Enable Register	<input checked="" type="checkbox"/>

Setting options :

Setup preferences

Parameter information

Register Status

Shows if the phone has been registered to the SIP

	server or not; or so, show Unapplied.
Server Name	SIP server's name. Phone supports server backup. If you want to use server backup, you must setup SIP1 server name, such as voip@1, and SIP2 server name, such as voip@2. and configure SIP2 account parameters same as SIP1's. When SIP1 server is unavailable, phone would switch to the SIP2 server as backup; if SIP1 server resumes, phone may switch to SIP1 and keep communication.
Server Address	Your SIP server address. It could be IPv4 address or domain name.
Server Port	SIP server port.
Account Name	SIP account name. usually same as Phone Number.
Password	SIP account password.
Phone Number	Input the phone number assigned by your VoIP service provider. Phone will not register if there is no phone number configured.
Display Name	Display name used to indicating the name of caller.
Proxy Server Address	Set proxy server IP address(Usually, Register SIP Server configuration is the same as Proxy SIP Server. But if your VoIP service provider give different configurations

between Register SIP Server and Proxy SIP Server, you need make different settings.)

Proxy Server Port	SIP proxy server port.
Proxy Username	SIP proxy server account name.
Proxy Password	SIP proxy server account password.
Domain Realm	The register server address as sip domain automatically. (Usually it is same with registered server and proxy server IP address).
Enable Register	Start to register or not by selecting it or not.

4 Click "Apply" to finish setting.

Auto Upgrading

Please contact service provider to get new version to upgrade.

Auto upgrading via network: Realized via SES system. Phone configures with the SES server address. it would detect from the server if it have new version. If you want to use by this mode, you need to refer to the documentation with How to use SES.

Auto upgrading via USB: Establish a directory named impinstall in USB disk. Then copy new version file into this directory and insert it to the phone's USB port. After phone reboot, phone would compare the system version with the new version: if they are different, phone would upgrade it automatically.

Phone Configuration

System Configuration



You can customize your IMP phone's with phone setting, network setting and screen setting.

Phone

Tap "phone" to enter the setting interface.

EXT prefix	If you make PSTN call, phone will add the prefix before the number and dial out.
Voice Record	Open voice record. When there is incoming call and user does not answer, phone would answer it and record the messages.
Status Tips	Caller ID with voice played Dialing with number played Key tone: voice indication when press keyboard or buttons DND: Do Not Disturb
Ring Tone	You may select a ring tone as your personal ring. Phone supports wav and mp3 file format.

Net

Tap "Net" to enter the setting interface.

Active IP	Current active IP that phone uses.
------------------	------------------------------------

DHCP	Phone may obtain network parameters from DHCP server automatically.
-------------	---

Static	IP Netmask Gateway DNS-1: main DNS server DNS-2: secondary DNS server
---------------	---

PPPoE	Username: ADSL account Password: ADSL account password
--------------	---

Screen

Tap "Screen" to enter the setting interface.

Screen Saver	After you open it, phone would enter screensaver mode.
---------------------	--

Wait time	The duration before into the screensaver mode.
------------------	--

ScreenSave Mode	You can choose three modes of screen saver: Album, Clock, LCD. Album: enter album playing after entering screensaver Clock: a analogue clock after entering screensaver
------------------------	--



LCD: close LCD display after entering screensaver

Music

You can choose one music you like to play after entering screensaver

language

You can choose 2 languages interface: Chinese/English

Desktop Set



You can customize the layout of icons and background of IMP phone. There are 5 customized desktop screen you can arrange.

Customizing the screen:

1 Tap "Desktop Set" to enter the setting interface. You will see the shortcut on the right side; rearrange icons based on your needs. You could also add and remove icons.

Note: each desktop screen could hold 10 icons most.

2 Switch to Background, you may change the background to the one you like. If you want to keep background black, you may tap "clear" .

3 Flick to other desktop screen to repeat the operation, you can customize them.

Shortcut access

You can open all applications by enter system application menu

Each application icon could be placed on each desktop screen.

Basic Functions


Onscreen keyboard

Use the onscreen keyboard to enter text, such as contact information, and web address. it support English and Chinese IME.



Dragging

You can press and drag the onscreen keyboard to any place you want.

Enter text

- 1 Tap a text field.
- 2 Tap  key on the keyboard.
- 3 Tap onscreen keyboard to type text.


Type Capital letters

Tap  key. When it displays blue color, it means capital status; tap  again to return.



Select language IME

Default is English IME.


Number and punctuation


Tap  to switch to number and punctuation board.

Space and carriage return

Tap  for enter or carriage return; tap  for space.









Delete character

Tap  as backspace to delete character; if you

want to delete characters, you may slide and select characters. Then tap .

Status Bar

Status bar has some phone's information on the right side of screen.

Status bar	meaning
 Network status(normal)	It means physical network is normal. Tap it to enter Net setting.
 Network status(error)	It means physical network has problem and need to be checked.
 USB	There is USB disk inserted to the phone. Tap it to enter the USB application selection.
 Missed call	There are missed calls. Tap it to read the records.
 earphone	There is earphone connected. Tap it to enter dialing interface.
 Auto upgrade	There is new file need to be upgraded. Tap it, you can select "upgrade" "later" or "cancel" to decide upgrade or not.
 DND opening	It means you have opened DND. Phone will not ring when a call, the call will be recorded as missed call.
 Voice record	It means you have new voice messages. Tap it to enter the record interface. Select and play the

messages. There would be indication if you record during talking.






message

There are push-messages from SES. Tap them to read the content of messages.

Idle Desktop Screen

IMP phone would display the idle desktop screen.

Contents displayed on the right side		meaning
	Vendor Logo	Tap the logo, you can choose: Vendor Hotline, Vendor Website, or cancel selection.
	Date/time	Shows current date and time. Tap it, and you can enter the time setting interface.
	weather	Shows current day's weather forecast.

System application menu



You can browse and run all system applications.

Phone	Get access to IMP phone calls: phone dialing, contact, call log, speed dial, picture dial, voice record, message etc.			
Menu	Multimedia	applications:	web	browser, media

player(music/video/internet radio/ network TV), album, RSS etc.

Tools

Assistant tools applications: calendar, calculator, clock, weather, file manager, calibrate, desktop set, phone set, note etc.

IMP phone call applications



phone

Make/answer phone calls, hotline, and manual dialing by num keypad.



contact

Contact information. You can also synchronize it with PC address book. Support select, add, dial, delete, SYN, edit contact information.



Call log

You can check dialed, received, missed calls.



Speed dial

You can make speed dial with the number you configured in speed dial keyboard.



Picture dial

You can make phone call with picture displayed.



record

Record can record during talking, voice record status, and local record which could help you make voice memo.



Web browser

You can browse website with IMP phone.



music

Music player. You can customize a play list to play music even if when you open other applications.



Video player.

video



album

You can browse photos or pictures in the phone; you may also browse and play via USB disk inserted into the phone.



RSS

You may subscribe and read RSS. With RSS, you can get website, blog, news and personal space's refresh.



calendar

Calendar query.



calculator

Scientific calculator, supporting + - x /



clock

Display and customize the world time you need.



**Weather
forecast**

Look up within 3 days of your city's weather forecast. You can also inquire other city's weather forecast.



File manager

You may use file manager to manage files in your phone.



calibrate

Calibration for touch screen.



Desktop Set

Customize desktop screen, layout and rearrange icons or background.



Include phone, net, screen settings.

Phone set

**note**

Note some important information. You can also open it during talking by tapping “note” .

**message**

Read pushing-message from SES server.

Phone call applications

phone



Making a call on IMP phone is as simple as tapping a name and number in your contacts, or tapping call logs.

IMP phone supports 2 kinds of call: VoIP and PSTN.

Making Calls

Use Contacts to call someone

Tap “Contact” , choose a contact, then tap the phone number to enter the dialing interface. Choose and tap call mode you want (Send-VoIP, or PSTN).

Use Call Log to call someone

Tap “Call log” , choose a log and then enter the dialing interface. Choose and tap call mode you want (Send-VoIP, or PSTN).

Use Speed dial

Tap “Speed dial” and choose someone configured to call.

Dial a number	Tap keypad, enter the number, then tap Send or PSTN.
Hotline	Tap vendor Logo, then tap "Dial the hotline" and choose call mode to call.
Use advertise call	Tap Phone, choose one advertise call on the right side of screen then tap.
Redial	<p>Press redial key, or tap "Phone" , then tap "Redial" on the screen.</p> <p>Note: If there is no dialed call, there would be no "Redial" display in the dialing interface to make redial.</p>

About deleting: During the dialing, if you dialed the wrong number, you may tap



to remove the wrong number and dial again; or you can press "backspace" (or return) key to remove.

Recording During Talking

You can tap "Record" to record the talking content. You can also tap "stop record" to finish it. Record file would be saved in the directory "Talking/" and named as date-time.

Note

You can tap "Note" to type text you need to remember. After finishing call, you can tap Note to view the content you typed.

Voice Record

Open voice record, so phone would answer incoming call and record messages

automatically. Phone would save it into the directory "message/" and named as date-time.

Contact



From a contact's info screen, a quick tap lets you make a phone call.



There are several numbers in a contact record: 1 mobile phone number, 3 phone numbers and 1 fax number.

You can edit contact with different groups (All, Person, Colleague, Black list).

The contact can enter up to 200 records.

Sync Contacts

Tap "Contact" , and then tap "SYN" . There would be selection to let you choose export or import contacts.

- **Import:** Enter the directory which saves CSV file, and choose the imported CSV file. You will enter the import interface. select items and select the corresponding item in "outside items" . After the match,  would be changed to .

Note: You can export contacts from address book such as outlook, and then import it into a phone. There must be included name and number to be imported into the phone automatically.

- **Export:** If there are contact records, you can export them directly. The CSV file

would be saved in the root directory, and named as date-time.

Searching Contact

You can search someone's number in contact.

The green letters in the keyboard on the right side shows there are contacts items, that the green letters are those names' first letters; If the letters show grey, it means there is no person's name with those letters. Tap a green letter, the corresponding contacts would be shown. For example, someone's name is Jasmine, and number is 8888. After you enter contact, the "J" on the right side keyboard would be displayed in green color. Tap "J", the item would be displayed. If there are several items with same first letter, there would be displayed with second green letters. The rest can be done in the same way, so you can find the person you need quickly.

Note: Phone does not support searching name which is composed by numbers.

Contacts management

Add contact

Tap "Add", and type information with name, numbers. Then tap OK.

Remove contact

Remove one item: choose one, and then tap "Delete". Tap "Delete Contact xxx" to remove.

Remove multiple items: choose the items, then tap "Delete". Tap "Delete Contact xxx" to remove.

Remove all: Tap "Select" and tap

"Delete" . Tap "Delete Contact xxx" to remove.

Edit contact

Choose one item and tap "Edit" .

Tap "Call Log" and choose the item. Then tap "Save" and "Create New Contact!" , or "Save to exist contact!" .

Add number in call log to contact

Note: If you choose to save to exist contact, you may save the number to mobile phone number, or other 3 numbers, or fax number. But if there is ☆ indication, it means there is number saved in.

Add photo for contacts

- 1 Choose a contact, and then tap "Edit" .
- 2 Tap photo area.
- 3 Then select photos in the box. Choose and quit.
- 4 Tap OK to exit.

You will add a photo for the contact. When this person calls you, or you call the person, there would be photo displayed on screen.

Choose a contact to call

Tap "contact" , choose a contact, then tap a phone number to enter the dialing interface. Choose and tap call mode you want (Send-VoIP, or PSTN).

Black list

Tap "contact" , choose a contact, then edit its group to B-List. Tap OK to save.

Then you can reject this call automatically.

Call Log






You can check dialed, incoming and missed call logs. There are 20 max entries of each type.

Tap "Call Log" , there would be displayed all logs recently. And there are calls count and current log number on the top right corner.

Checking Missed

- When there is missed call, there would be indication icon the desktop. Tap it to check it.
- Tap "Call Log" to view all logs. If there are red indication icons, it means that they are not checked. After you check, it would be changed to grey color.

Checking all logs of a number

- Choose a log and tap, there would be all call logs related with the number in detail (including dialed, incoming and missed).
-  represents dialed;  represents incoming;  represents missed.

Call Log Management

Delete call log

Delete a item: Choose a item and tap

"Delete" . Then choose "Delete these

record?" .

Delete multiple items: Choose multiple items and tap "Delete" . Then choose "Delete these record?" .

Delete all: Tap "Select" and then "Delete" . Choose "Delete these record?" .

Call from call log:

- Tap "Call Log" . Select a log and tap "Dial" to enter the dialing interface. Choose "Send" or "PSTN" to make call.

Black List:

- Tap "Call Log" . Select a log and tap "Blacklist" to choose "Add selected to blacklist?" .

Speed Dial



You can call quickly by speed dial configured.

Checking Speed Dial

Tap "Speed Dial" , there would be 16 speed dial buttons on the screen. Default they are empty. There are 48 speed dial items totally. You can configure them with the numbers you need. Use ◀ ▶ on the bottom of screen. If you configured speed

dial with number and name, then the buttons would displayed with the names.

You can also use navigation keys to choose the speed dial button. The blue button means it is current one edited.

Speed Dial Management

Use navigation keys to choose the speed dial button. Tap "Edit" to configure. If the speed dial button is empty without number, you can tap it directly to edit.

Add manually: Add speed dial with name and number. If there is no name, it would use number as name to display on the button. It does not accept adding without number.

Edit

Add from contact: Tap an empty speed dial button, then tap "Contact" and choose a number and tap. Phone would add the name and number to the speed dial automatically.

Choose Type: You can choose SIP (VoIP) or PSTN to make call.

Delete speed dial

Choose a speed dial button, then tap "Delete" to choose "Delete xxx?" .

Picture Dial



You can use picture dial to make calls. In this way, you can “see” the call with picture or photo visually.

Checking Picture Dial


There are 9 picture dial items totally. Each screen would show 3 items. Default is empty. After you configure, it would be displayed with picture, name and number.

You can flick left or right to switch to other items, or tap ◀ ▶ to switch; tap



to exit.

Picture Dial management

Tap  to edit picture dial. If the item is not configured, you could also tap black part to edit the item with picture, name and number.

Add manually: Add picture, name and number manually. If name is not configured, phone would use number as name; it would be failed if there is no number for item.

Add from contact: Tap “contact” and select one to add for picture dial automatically.

Edit picture: Tap picture area. There would be picture selection box. After you choose one, the

Edit

picture area would be added. Tap "Quit" to exit.

Call type: Choose SIP (VoIP) or PSTN to make call.

Delete picture dial

Tap  and then tap "delete" to remove the item.

Call via picture dial


Tap "picture dial" and choose one to dial out.

Note: if you delete the picture configured for picture dial, it would lost the name and number, too.


Record




Starting Record

Tap  to start record. There would be recording time display.

Stop Record

Tap  to stop record.

Save Record

Tap  to stop record, and there would be selection to let you decide save the record or discard it. Select save, record file would be saved in the current directory and named as date-time.



Record playing



Play record

Tap .


Next/Previous

Tap  to jump to previous record , tap  to jump to next record.


Skip to any point in a record

Drag the playhead along the scrubber bar.

Delete a Record File

Tap  to delete it.

Lock a Record File

Tap  to lock the record file, which could protect your important record file avoid of being deleted by mistake.

Message



You can get messages pushed from the SES system.

Read Messages

When SES system pushes messages to IMP phone, it would be a indication icon on the desktop. Tap the icon to enter Message, and then choose the message you

want to check. Tap “Detail” to read the content.

Other Applications


Web Browser



Web browser let you surf web and view webpages on IMP phone in the same way as if you were on your computer.

Home page is: qrc:startpage.html

Opening Webpages

Open a webpage: Tap the address field, and then type web address and tap .

When you type, there are some web addresses would be shown up. They are pages you opened recently. Select one to open it again, else keep typing a new address.

Erase the text in the address field: Tap the address field, and then flick and select the text, press backspace to delete.

Scrolling

You can scroll around a webpage by dragging up/down/left/right. When scrolling, you can touch and drag anywhere on the page without activating any links.




Navigating Webpages

Links on webpages typically take you to another place on the web.

Follow a link on a webpage: Tap the link.

Stop a webpage from loading	Tap  .
------------------------------------	---

Reload a webpage	Tap  .
-------------------------	---

Return to the previous or next page	Tap  or  . You can also tap  to select some page you want to go.
--	---

Entering Text and Filling out Forms

Some webpages have text fields and forms to fill out.

Bring up the keyboard	Press onscreen keyboard.
------------------------------	--------------------------

Move to another text field	Tap another text field.
-----------------------------------	-------------------------

Once you finish filling out a form, tap “enter” .

Submit a form	Most pages also have a link you can tap to submit the form.
----------------------	---

Close the keyboard without submitting the form	Press onscreen keyboard.
---	--------------------------


Close Web Browser

Tap  in the corner or  to close browser.

Music






High quality acoustics effect can let you enjoy music playing on the IMP phone.

For convenient, you could tap  to switch between music player and video player, so you don't have to close one and then enter another one.


Tap "Music" , you would get a player window which could let you do some other operation when you enjoy music.

In the window, you can:

Tap  to enter full screen window; in full screen mode, tap  to return player window.

Tap  to minimize music player. There would be a small player icon on the upper left , tap small icon to return player window.

Playlist

Add songs: Tap "Add" , then choose music files you want play (you can choose by tapping file icon changed to ). Tap OK to add to list.

Delete songs: Tap "Delete" , then tap Delete button on screen.


Note: the playing music cannot be deleted.

Change playing sequence: Tap  in the list to move the music file up.

Play music



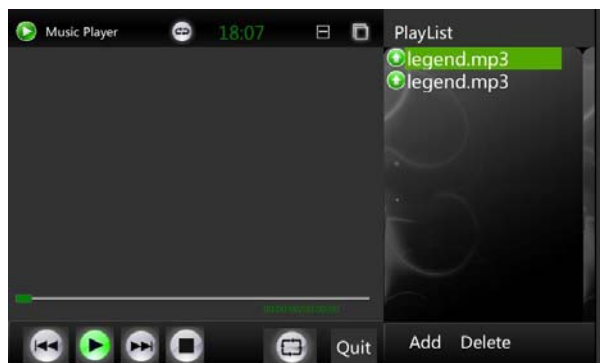


Choose a music and Tap .

Music playing control



Play

Tap .

Pause	Tap  .
Stop	Tap  .
Volume+/-	Press vol+/- key on the phone.
Next/previous	Tap  to jump to previous music; tap  to jump to next music.
Skip to any point in a music	Drag the playhead along the scrubber bar.
Select playing mode	Tap  continuously to change playing mode: single playing, repeating the current music, and repeat all music in current list.

Video






You can view video content such as movies, music videos and so on.

For convenient, you could tap  to switch between music player and video player

Tap "Video" , you would get a player window which could let you do some other operation when you enjoy video.


In the window, you can:

Tap  to enter full screen window; in full screen mode, tap  to return player window.

Tap  to minimize music player. There would be a small player icon on the upper

left; tap small icon to return player window.

Playlist

Add videos: Tap "Add" , then choose video files you want play (you can choose by tapping file icon changed to ). Tap OK to add to list.

Delete videos: Tap "Delete" , then tap Delete button on screen.

Note: the playing video cannot be deleted.

Change playing sequence: Tap  in the list to move the music file up

Play video

Choose a video and Tap .

Video playing control





Play	Tap  .
-------------	---

Pause	Tap  .
--------------	---


Stop	Tap  .
-------------	---

Volume+/-	Press vol+/- key on the phone.
------------------	--------------------------------

Next/previous	Tap  to jump to previous video; tap  to jump to next video.
----------------------	---

Skip to any point in a video	Drag the playhead along the scrubber bar.
-------------------------------------	---

Select playing mode

Tap  continuously to change playing mode:
single playing, repeating the current video, and
repeat all video in current list.

Note: available video file formats are flv and mpg; and the max resolution is 480x227 temporarily.

Album



IMP phone can let you take photos, so you can share them with your family, friends, and associates. You can also sync photos, and assign photos to identify contacts when they call.

View Photos

You can view photos in the phone or in the usb disk via "album" .


Browse Photos files:

1 In album:

Tap "Pictures" to browse all photo files.

2 Tap a photo to see it in full screen.



Show the controls: Tap the full-screen photo to show the controls.

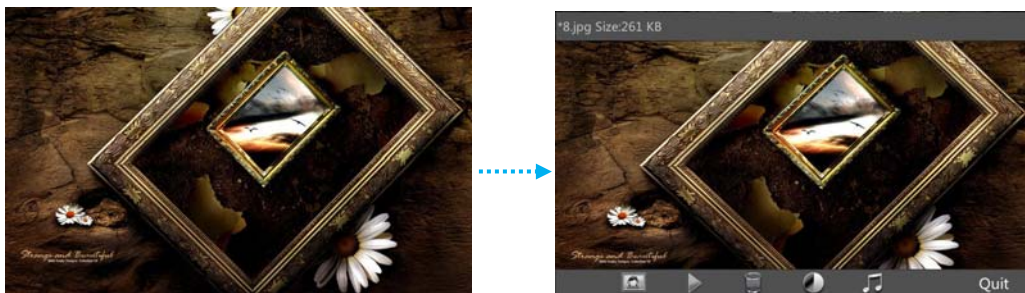

View photos with thumbnails :

- **Pictures:** Show all photo directory and files in the album base.
- **Albums:** Show album display list. Add photos to album list during you viewing pictures.

See the next or previous photo: Flick left or right.

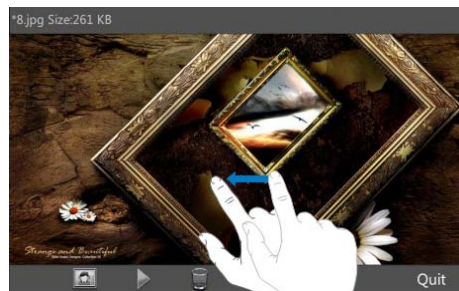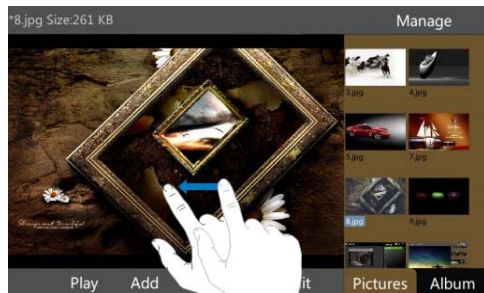

Slideshow

You can view photo album as slideshows, complete with background music.

View photo album as a slideshow: Tap ► after show control bar.

Stop a slideshow: Tap the screen.

Delete the current photo: Stop the slideshow first, and then choose the photo, and tap 🗑️.

Black/white effect: Stop the slideshow first, choose the photo and tap 🌓.

Play background music: Stop the slideshow first, then tap 🎵.

Add photo frame: Stop the slideshow first, then tap 🖼️. Tap 🖼️ continuously to change more frames.

RSS Reader



RSS (Really Simple Syndication) is an easy way for delivering regularly changing web content. Many new-related sites, weblogs and other online publishers syndicate their content as RSS Feed if you want it.

Default RSS Feed

News channel/Blog/financial/IT and so on.

News channel: There are many kinds of news channel in it, such as news, technology, music and entertainment.


Star's Blog: Some stars or famous blogs.

Read RSS

Flick right or left to switch channel.



Flick up or down to choose Feed.



RSS Reading

Read abstract: Display RSS Feed abstract (including title and partial content). Flick

up or down to check others.

Read RSS in detail: Tap RSS Feed abstract, then tap “in detail” to show more content. You can also tap “Web” to read from web site.

Calendar



Calendar lets you view calendars information.

Calculator



Using Calculator

Tap numbers and functions in Calculator just as you would with a standard calculator. When you tap the add, subtract, multiply, or divide button, the operator would be displayed to let you know the operation to be carried out.

Standard Memory Functions

- MS: Tap to save the number to the memory.
- MC: Tap to clear the memory
- MR: Tap to replace the displayed number with the number in memory.
- M+: Tap to add the displayed number to the number in memory. If no number is in memory, tap to store the displayed number in memory.
- CE: Tap to clear the displayed number.

If there is number saved in memory, there would be a “M” indication.

Standard Calculator Keys



Calculates percentages, adds markups and subtracts discounts. To calculate a percentage, use it with the multiplication(x) key. For example, to calculate 8% of 500, enter

500 X 8 % =

which returns 40.


√ Calculate the square root of a value.


Clock



You can set clock to show the time in other major cities and time zone around the world.

View Clock: There would be the standard time gotten from time server.

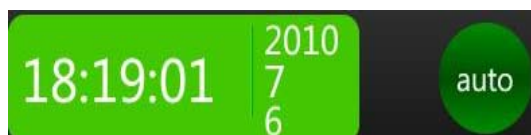


Time zone setting: Tap "Set Timezone" , then choose some place your city belong to, or switch by tapping .

Note: Timezone setting only takes effect when you use auto mode.

Time manual set:



1 Tap “manual” . if it changes with green color, it means manual setting is taking effect.

2 Flick and set the parameters(hour/minute/second/year/month/day). Use the onscreen keyboard to configure.  is used as backspace.

3 Tap OK to refresh the new time you configured.

Note: Manual time would be lost after phone reboot.

Weather



Tap Weather to get the current temperature and 3-day forecast for one or more cities around the world.

Check weather forecast



If the weather board is light blue, it's daytime in that city.

Getting other city's weather information

1 Tap  after other cities.

2 Input city's name and then tap . Then you would get the information.

File manager



You can use file manager to manage the phone system files.

Check files

Tap some directory and enter it to check files, or use navigation key to choose some directory and tap OK to enter. "." "/" means parent directory.


File management

Creating directory	Tap "Add Dir" in file manager, then input dir name and tap OK.
Moving directory or file	Drag the directory or file you selected from one side to the other side; or choose the item then tap the arrow in middle of the screen to move.
renaming	Choose the item, tap "Rename" to input the new name, and then tap OK.
deleting	Choose the item, then tap "Delete" .

Calibration



You can use it for touch screen calibration when you feel problems of touching operation.

Tap "calibrate" , then follow the instruction and  to tap 5 times accurately. If you need to refresh the calibration, select "Save Calibration" , else "not save" .

Note: It would take effect only after phone reboot by system.

Note



You could make note every time you need to remember or record.

Read Note

Tap "Note" and then read the content in it.


Edit Note

Tap "Note" , then press onscreen keyboard to type text you need. Or just number keypad to input number.

Delete Note

Tap "Note" , then press onscreen keyboard to use backspace to delete. Or you could glide to choose the words you need to delete, and then use backspace to delete.

Close Note

Tap , you can close it and return.